



FD (High pressure) 3/16, 10/24, 12/24

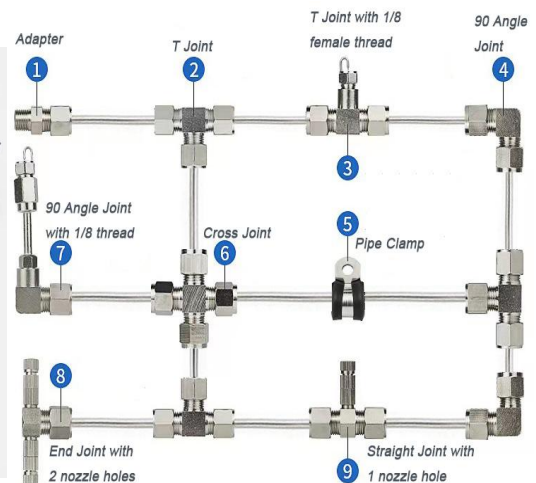

Accessories

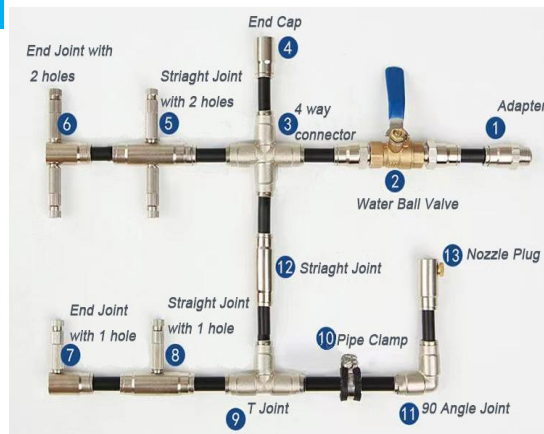

FD (Low pressure)
Quick connect
(6mm, 8mm)



Accessories

Performance Data

Thread Size	Style NO.	Orifice Dia.	Flow rate(L/min)											
		mm	3bar	4bar	7bar	10bar	15bar	18bar	35bar	50bar	70bar	84bar	100bar	120bar
1/8	1010	0.1							0.01	0.02	0.03	0.04	0.05	0.06
	1510	0.15						0.02	0.03	0.04	0.05	0.051	0.059	0.075
3/16	2010	0.2					0.05	0.06	0.07	0.08	0.09	0.098	0.10	0.114
10/24	3010	0.3				0.06	0.07	0.08	0.09	0.10	0.11	0.16	0.166	0.176
12/24	4010	0.4	0.07	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.28	0.38	0.39	0.41
	5010	0.5	0.08	0.10	0.13	0.16	0.19	0.21	0.23	0.26	0.30	0.39	0.40	0.42
	6010	0.6	0.09	0.12	0.14	0.17	0.20	0.23	0.27	0.32	0.38	0.49	0.50	0.52
	8010	0.8	0.11	0.13	0.15	0.18	0.22	0.26	0.30	0.36	0.48	0.59	0.60	0.62